


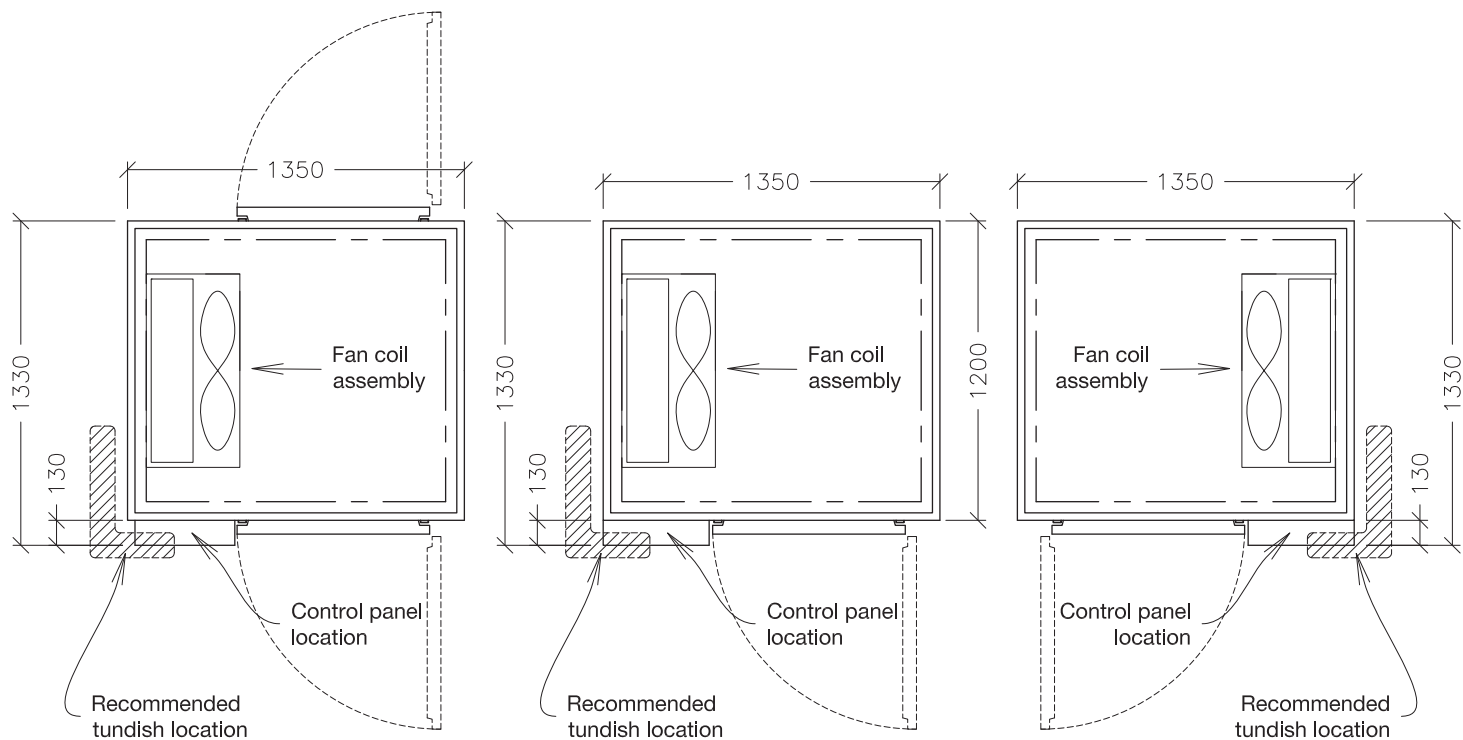

Technical Data

Dimensions (WDH): 1350 x 1330 x 2350
Clear door opening: 695 x 1898
Trolley capacity: 690 x 1040 x 1890
Floor: 25mm floor available (not standard)

Temperature (chilling): 70°C to 3°C in less than 90 mins
Temperature (freezing): 70°C to -18°C in less than 240 mins
Capacity: 150kg

Cooling Duty @ -30°C (kW): 9
Number of fans: 3
Number of coils: 1
Fan load (kW): 0.6
Defrost load (kW): 4
Drainage: 22mm drain connection / tundish required
Evaporating temperature: -30°C
Refrigerant control: TEV (MOP @ +0°C)
Gas: R404a
Inlet size: 1/2"
Outlet size: 1 1/8"
Electrical supply: 240V 20A (fans and defrost)



- Notes:
- Modular unit / Assembly required
 - Floor surface +/- 5mm recommended
 - Separate 415V 3 phase compressor and condenser unit required.
 - Right hand hinged, left hand hinged and pass through models shown
 - Pass through models available in various door hinging arrangements
- Available on request
LH/LH, RH/RH, RH/LH, LH/RH

