




Technical Data

Dimensions (WDH):	1350 x 2330 x 2350
Clear door opening:	695 x 1898
Trolley capacity:	690 x 1040 x 1890
Floor:	25mm floor available (not standard)
Temperature (chilling):	70°C to 3°C in less than 90 mins
Temperature (freezing):	70°C to -18°C in less than 240 mins
Capacity:	250kg
Cooling Duty @ -30°C (kW):	18
Number of fans:	6
Number of coils:	2
Fan load (kW):	1.2
Defrost load (kW):	8
Drainage:	22mm drain connection / tundish required
Evaporating temperature:	-30°C
Refrigerant control:	TEV (MOP @ +0°C)
Gas:	R404a
Inlet size:	1/2"
Outlet size:	1 1/8"
Electrical supply:	415V 16A (fans and defrost)

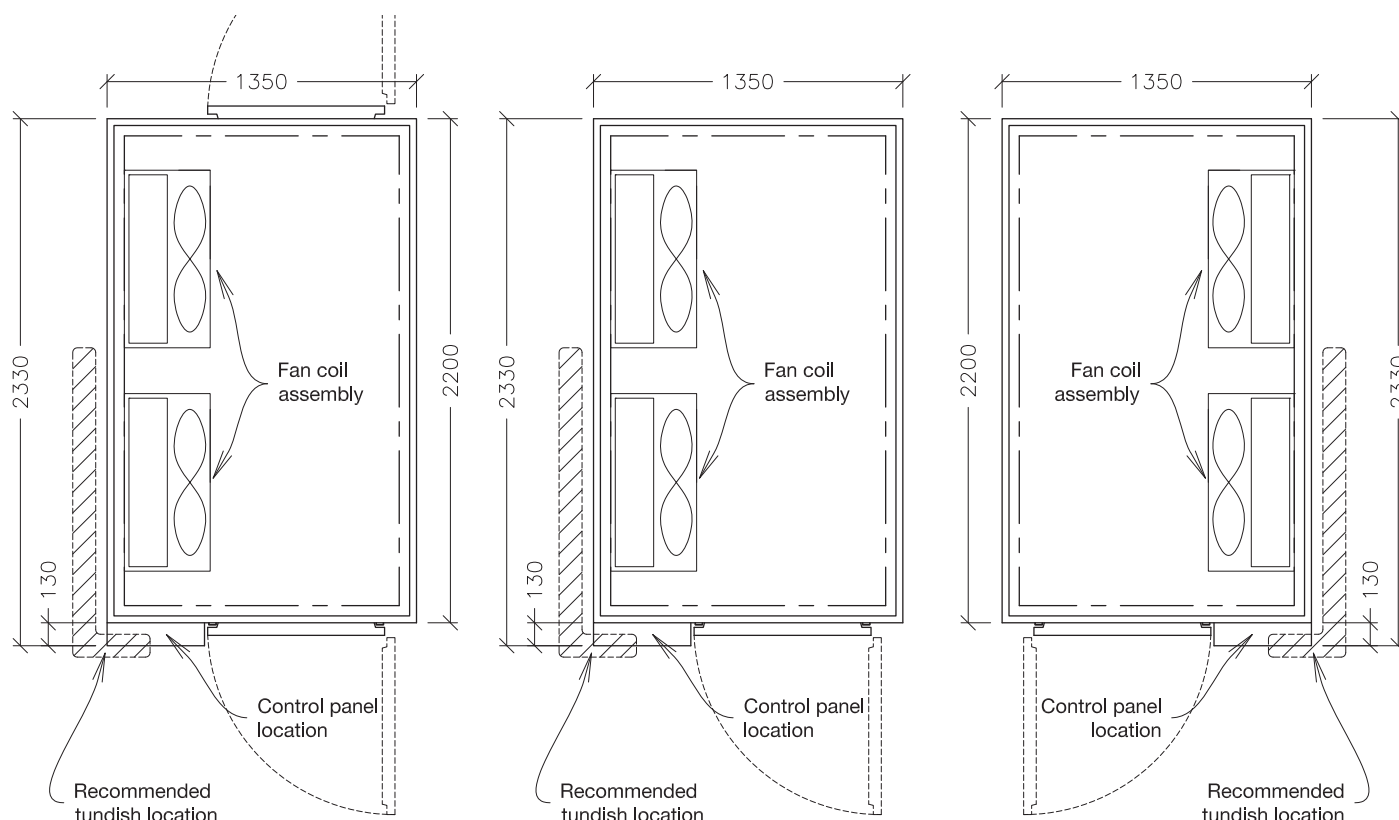

Notes:

- Modular unit / Assembly required
- Floor surface +/- 5mm recommended
- Separate 415V 3 phase compressor and condenser unit required.
- Right hand hinged, left hand hinged and pass through models shown
- Pass through models available in various door hinging arrangements

Available on request

LH/LH, RH/RH, RH/LH, LH/RH



Regethermic | Unit 4, 7-9 Orion Rd, Lane Cove West, NSW, 2066, Australia
Tel. +61 2 9966 9500 | www.regethermic.com.au | info@regethermic.com.au



We reserve the right to make changes without notice.