



BLANCO
PROFESSIONAL

BLANCO MANHATTAN

Modules and Options



MANHATTAN

Food servery system

| | |
|---|----|
| Heated servery counter | 4 |
| Cold food and beverage servery counter | 10 |
| Cooled servery counter, convection-cooled | 14 |
| Plain servery counter | 18 |
| PRE-MIX/ POST-MIX module | 26 |
| Roll-in counter | 32 |
| Servery counter | 34 |
| Showcase, refrigerated | 40 |
| Stand showcase, refrigerated | 42 |
| Cash register booth | 44 |
| Inside-corner module | 48 |
| Outside-corner module | 50 |
| Inside-corner module, mobile | 52 |
| Outside-corner module, mobile | 56 |
| Silverware and tray servery counter | 60 |
| Overview of granite top surfaces | 60 |
| Overview of Resopal colours and designs | 61 |
| Overview of MANHATTAN modules | 62 |

MANHATTAN HEATED SERVERY COUNTER MWA 3

- CNS top surface with 3 seamlessly welded-in heat retaining wells with individual drains
- Capacity: 3 x GN 1/1, max. depth: 200 mm
- Temperature range: +30 °C to +95 °C, can be individually heated wet or dry
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|---|------------------------------|-------------------|-----------|
| MANHATTAN MWA 3 | Heated servery counter can be heated wet or dry Cabinet compartment open on operator side with 4 pair of deep-drawn support ledges Spacing: 75 mm, for GN 1/1 | 1200 x 700 x 900 | 400 V CEE plug | 566 609 |
| MANHATTAN MWA 3 | Heated servery counter can be heated wet or dry Cabinet compartment closed on operator side with 4 pair of deep-drawn support ledges Spacing: 75 mm, for GN 1/1, 1 double-walled hinged door | 1200 x 700 x 900 | 400 V CEE plug | 566 610 |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 3

| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 3

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door, lockable | 4.4 Door, lockable (2 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.8 1-level, pulled down on both sides with pass-through (275 mm), with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| | | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN HEATED SERVERY COUNTER MWA 4

- CNS top surface with 4 seamlessly welded-in heat retaining wells with individual drains
- Capacity: 4 x GN 1/1, max. depth: 200 mm
- Temperature range: +30 °C to +95 °C, can be individually heated wet or dry
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|-------------------|----------------|
| MANHATTAN MWA 4 | Heated servery counter can be heated wet or dry Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 1550 x 700 x 900 | 400 V CEE plug | 566 611 |
| MANHATTAN MWA 4 | Heated servery counter can be heated wet or dry 2 cabinet compartments closed on operator side with 4 pairs each of deep-drawn support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 | 400 V CEE plug | 566 612 |
| MANHATTAN MWA 4 | Heated servery counter can be heated wet or dry 2 cabinet compartments closed, convection- heated and insulated on operator side with 4 pairs each of support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 | 400 V CEE plug | 566 613 |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 4

| Designation | Model | | | |
|--------------|-------|---|------------|---------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| | | | | 2.3.3 Left and right [2x] |
| | | | | 2.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 4

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door, lockable | 4.4 Door, lockable (3 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Stainless steel, for model with open cabinet | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.8 1-level, pulled down on both sides with pass-through (275 mm), with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN HEATED SERVERY COUNTER MWA 5

- CNS top surface with 5 seamlessly welded-in heat retaining wells with individual drains
- Capacity: 5 x GN 1/1, max. depth: 200 mm
- Temperature range: +30 °C to +95 °C, can be individually heated wet or dry
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|-------------------|-----------|
| MANHATTAN MWA 5 | Heated servery counter can be heated wet or dry Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 1900 x 700 x 900 | 400 V CEE plug | 566 614 |
| MANHATTAN MWA 5 | Heated servery counter can be heated wet or dry 3 Cabinet compartments closed on operator side: 1 compartment with 4 pairs of deep- drawn support ledges, 2 compartments with 4 pairs each support ledges, Spacing: 75 mm, each for GN 1/1, 3 double-walled hinged doors | 1900 x 700 x 900 | 400 V CEE plug | 566 615 |
| MANHATTAN MWA 5 | Heated servery counter can be heated wet or dry 3 Cabinet compartments closed on operator side: 1 compartment with 4 pairs of deep- drawn support ledges, 2 convection-heated and insulated com- partments with 4 pairs each support ledges, spacing: 75 mm, each for GN 1/1, 3 double-walled hinged doors | 1900 x 700 x 900 | 400 V CEE plug | 566 616 |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 5

| Designation | Model | | | |
|--------------|-------|---|------------|---------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| | | | | 2.3.3 Left and right [2x] |
| | | | | 2.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN HEATED SERVERY COUNTER MWA 5

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door, lockable | 4.4 Door, lockable (4 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Stainless steel, for model with open cabinet | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 3

- CNS top surface with seamlessly welded-in cooling tray
- Capacity: 3 x GN 1/1, max. depth: 150 mm
- Temperature range: +7 °C to +12 °C at an ambient temperature of +25 °C, set to +7 °C at factory
- Refrigerant: R 134 a, CFC-free
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|---|------------------------------|----------------------|-----------|
| MANHATTAN MKA 3 | Cold food and beverage servery counter with active contact cooling Cabinet compartment open on operator side with 4 pair of deep-drawn support ledges Spacing: 75 mm, each for GN 1/1 | 1200 x 700 x 900 | 230 V Schuko plug | 566 603 |
| MANHATTAN MKA 3 | Cold food and beverage servery counter with active contact cooling Cabinet compartment closed on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm, 1 double-walled hinged door | 1200 x 700 x 900 | 230 V Schuko plug | 566 604 |
| MANHATTAN MKA 3 | Cold food and beverage servery counter with active contact cooling Cabinet compartment convection-cooled, insulated on operator side with 4 pairs of support ledges, spacing: 75 mm, each for GN 1/1, 1 double-walled hinged door | 1200 x 700 x 900 | 230 V Schuko plug | 566 605 |

OPTIONS FOR MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 3

| Designation | Model | | | |
|--------------|-------|---|------------|---------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| | | | | 2.3.3 Left and right [2x] |
| | | | | 2.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 3

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side, with cooling slits | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side, with cooling slits | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (1 door) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V | | | |
| Pull-out bottle rack | 4.8 Pull-out bottle rack, only in conjunction with refrigerated underframe | | | |
| Slatted shelf | 4.9 3 pieces in set, stainless steel, for beverage servery counter | | | |
| Condensation-water evaporator | 4.11 Electric condensation water evaporation (only in conjunction with convection-cooled cabinet compartment) | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 4

- CNS top surface with seamlessly welded-in cooling tray
- Capacity: 4 x GN 1/1, max. depth: 150 mm
- Temperature range: +7 °C to +12 °C at an ambient temperature of 25 °C, set to +7 °C at factory
- Refrigerant: R 134 a, CFC-free
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|---|------------------------------|----------------------|-----------|
| MANHATTAN MKA 4 | Cold food and beverage servery counter with active contact cooling Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 1550 x 700 x 900 | 230 V Schuko plug | 566 606 |
| MANHATTAN MKA 4 | Cold food and beverage servery counter with active contact cooling 2 cabinet compartments closed on operator side with 4 pairs each of deep-drawn support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 | 230 V Schuko plug | 566 607 |
| MANHATTAN MKA 4 | Cold food and beverage servery counter with active contact cooling 2 cabinet compartments, convection-cooled and insulated on operator side, with 4 pairs each of support ledges spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 | 230 V Schuko plug | 566 608 |

OPTIONS FOR MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 4

| Designation | Model | | | |
|--------------|-------|---|------------|---------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| | | | | 2.3.3 Left and right [2x] |
| | | | | 2.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN COLD FOOD AND BEVERAGE SERVERY COUNTER MKA 4

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side, with cooling slits | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side, with cooling slits | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (2 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V | | | |
| Pull-out bottle rack | 4.8 Pull-out bottle rack, only in conjunction with refrigerated underframe | | | |
| Slatted shelf | 4.9 4 pieces in set, stainless steel, for beverage servery counter | | | |
| Condensation-water evaporator | 4.11 Electric condensation water evaporation (only in conjunction with convection-cooled cabinet compartment) | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN CONVECTION-COOLED SERVERY COUNTER MKU 3

- CNS top surface with edged, permanently integrated convection-cooling well with CFC-free insulation
- A large-area finned evaporator is located below the removable lay-in tray, which can be folded up for easy cleaning
- Capacity: 3 x GN 1/1, max. depth: 200 mm
- Temperature range: +2 °C to +12 °C at an ambient temperature of +32 °C, set to +7 °C at factory
- Refrigerant: R 134 a, CFC-free
- With electric condensation water evaporation
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865

| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|----------------------|-----------|
| MANHATTAN MKU 3 | Convection-cooled servery counter with active convection cooling Underframe closed | 1200 x 820 x 900 | 230 V Schuko plug | 573 367 |

OPTIONS FOR MANHATTAN CONVECTION-COOLED SERVERY COUNTER MKU 3

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN CONVECTION-COOLED SERVERY COUNTER MKU 3

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN CONVECTION-COOLED SERVERY COUNTER MKU 4

- CNS top surface with edged, permanently integrated convection-cooling well with CFC-free insulation
- A large-area finned evaporator is located below the removable lay-in tray, which can be folded up for easy cleaning
- Capacity: 4 x GN 1/1, max. depth: 200 mm
- Temperature range: +2 °C to +12 °C at an ambient temperature of +32 °C, set to +7 °C at factory
- Refrigerant: R 134 a, CFC-free
- With electric condensation water evaporation
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865

| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|----------------------|----------------|
| MANHATTAN MKU 4 | Convection-cooled servery counter with active convection cooling Underframe closed | 1550 x 820 x 900 | 230 V Schuko plug | 573 368 |

OPTIONS FOR MANHATTAN CONVECTION-COOLED SERVERY COUNTER MKU 4

| Designation | Model | | | |
|--------------|---------------------------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 2.3.3 Left and right [2x] | | | |
| | 2.4.3 Left and right [2x] | | | |
| Feet | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN

CONVECTION-COOLED SERVERY COUNTER MKU 4

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN PLAIN SERVERY COUNTER MNE 3

- CNS top surface
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MNE 3 | Plain servery counter Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), Spacing: 75 mm | 1200 x 700 x 900 | 566 596 |
| MANHATTAN MNE 3 | Plain servery counter 2 cabinet compartments closed on operator side sides with 4 pairs each of deep-drawn support ledges, Spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1200 x 700 x 900 | 566 597 |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 3

| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 3

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (2 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V, required for Glass gantry with lighting | | | |
| | 4.8 230 V, required for Glass gantry with lighting | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry (* only in conjunction with electrical connection 4.7) | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting* | | | |
| | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting* | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting* | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting* | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN PLAIN SERVERY COUNTER MNE 4

- CNS top surface
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MNE 4 | Plain servery counter Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), Spacing: 75 mm | 1550 x 700 x 900 | 566 598 |
| MANHATTAN MNE 4 | Plain servery counter 3 Cabinet compartments closed on operator side sides with 4 pairs each of deep-drawn support ledges, Spacing: 75 mm, each for GN 1/1, 3 double-walled hinged doors | 1550 x 700 x 900 | 566 599 |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 4

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 4

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (3 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V, required for Glass gantry with lighting | | | |
| | 4.8 230 V, required for Glass gantry with lighting | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry (* only in conjunction with electrical connection 4.7) | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting* | | | |
| | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting* | | | |
| | 7.6 1-level, pulled down on both sides with pass-through (275 mm) | | | |
| | 7.7 1-level, pulled down on both sides with pass-through (275 mm), with lighting* | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting* | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN PLAIN SERVERY COUNTER MNE 5

- CNS top surface
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MNE 5 | Plain servery counter Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), Spacing: 75 mm | 1900 x 700 x 900 | 566 600 |
| MANHATTAN MNE 5 | Plain servery counter 3 Cabinet compartments closed on operator side: 2 compartments with 4 pairs each of deep-drawn support ledges, Spacing: 75 mm, each for GN 1/1, 1 compartment with 4 pairs of deep-drawn support ledges for middle shelves, spacing: 75 mm, 4 double-walled hinged doors | 1900 x 700 x 900 | 566 601 |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 5

| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE 5

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (4 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V, required for Glass gantry with lighting | | | |
| | 4.8 230 V, required for Glass gantry with lighting | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry (* only in conjunction with electrical connection 4.7) | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting* | | | |
| | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.5 1-level, pulled down on customer side with pass-through (275 mm), with lighting* | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| | 7.13 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm), with lighting* | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN PLAIN SERVERY COUNTER MNE V

- CNS top surface
- Installation only possible between 2 modules
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MNE V | Plain servery counter Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 800–1900 x 700 x 900 | 566 602 |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE V

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN PLAIN SERVERY COUNTER MNE V

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V | | | |
| | 4.8 230 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.4 1-level, pulled down on customer side with pass-through (275 mm) | | | |
| | 7.12 2-level, pulled down on customer side with pass-through at top and bottom (155 and 275 mm) | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN PRE-MIX/POST-MIX MODULE MPP 3

- CNS top surface
- Closed on operator side
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MPP 3 | PRE-MIX/POST-MIX module with roll-in niche (917 x 475 x 800 mm) for rolling in beverage containers, 2 hinged doors | 1200 x 700 x 900 | 566 896 |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 3


| Designation | Model | | | |
|---|-------|---|---------------------|-----------------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 2.3.3 | Left and right [2x] | | |
| | 2.4.3 | Left and right [2x] | | |
| Feet | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| | 3.2 | Feet, stainless steel | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 | Long side | 3.3.1 Customer side | 3.3.2 Operator side |
| | 3.4 | Short side | 3.4.1 Left | 3.4.2 Right |
| | | | | 3.3.3 Customer/operator side [2x] |
| | | | | 3.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 3

| Designation | Model | | | |
|-----------------------|--|---------------------|---------------------|-----------------------------------|
| Socket outlets | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| | 4.8 230 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, Only one panel required per module | | | |
| Cable opening | 10.1 For CNS top surface, in middle | | | |

MANHATTAN PRE-MIX/POST-MIX MODULE MPP 4

- CNS top surface
- Closed on operator side
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options
- Compliant with DIN 18865

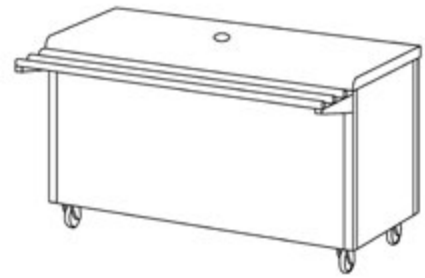

| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MPP 4 | PRE-MIX/POST-MIX module with roll-in niche (1267 x 475 x 800 mm) for rolling in beverage containers, 2 hinged doors | 1550 x 700 x 900 | 566 897 |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 4


| Designation | Model | | | |
|---|-------|---|---------------------|-----------------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 | Long side | 3.3.1 Customer side | 3.3.2 Operator side |
| | 3.4 | Short side | 3.4.1 Left | 3.4.2 Right |
| | | | | 3.3.3 Customer/operator side [2x] |
| | | | | 3.4.3 Left and right [2x] |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 4

| Designation | Model | | | |
|-----------------------|--|---------------------|---------------------|-----------------------------------|
| Socket outlets | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| | 4.8 230 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |
| Cable opening | 10.1 For CNS top surface, in middle | | | |

MANHATTAN PRE-MIX/POST-MIX MODULE MPP 5

- CNS top surface
- Closed on operator side
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options

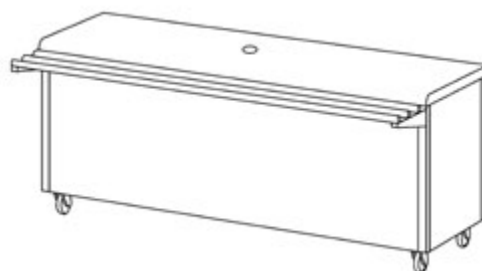

| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MPP 5 | PRE-MIX/POST-MIX module with roll-in niche (1617 x 475 x 800 mm) for rolling in beverage containers, 2 hinged doors | 1900 x 700 x 900 | 566 898 |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 5


| Designation | Model | | | |
|---|-------|---|---------------------|---------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 | Long side | 3.3.1 Customer side | 3.3.2 Operator side |
| | 3.4 | Short side | 3.4.1 Left | 3.4.2 Right |

OPTIONS FOR MANHATTAN PRE-MIX/POST-MIX MODULE MPP 5

| Designation | Model | | | |
|-----------------------|--|---------------------|---------------------|-----------------------------------|
| Socket outlets | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| | 4.8 230 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |
| Cable opening | 10.1 For CNS top surface, in middle | | | |

MANHATTAN ROLL-IN COUNTER MEN V

- CNS top surface
- For customer and short-side panelling, see Options
- Compliant with DIN 18865

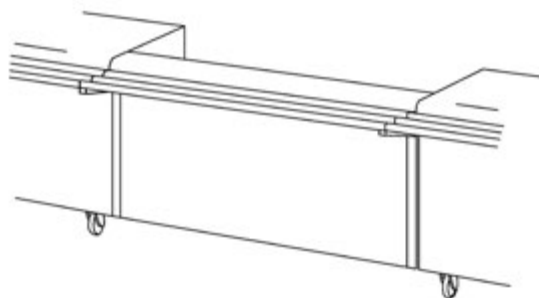

| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MEN V | Roll-in counter Roll-in niche (500 to 1550 x 500 mm) for rolling in dispensers, installation of module only possible between two modules (except corner modules) | 500–1500 x 200 x 900 | 566 899 |

OPTIONS FOR MANHATTAN MEN V ROLL-IN COUNTER

| Designation | Model | | | |
|-----------------|-------|---|---------------------|-----------------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| Skirting panels | 3.3 | Long side | 3.3.1 Customer side | 3.3.2 Operator side |
| | | | | 3.3.3 Customer/operator side [2x] |

OPTIONS FOR MANHATTAN MEN V ROLL-IN COUNTER

| Designation | Model | | | | |
|-----------------------|-------|--|---------------------|-------------|---------------------------|
| Tray slide | 5.1 | Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.3 | Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| Module connection | 6.1 | Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 | For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 | For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN SERVERY COUNTER MAN 3

- CNS top surface
- One 230 V Schuko socket outlet each at right on operator side, e.g. for connecting a plate dispenser
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|-------------------|-----------|
| MANHATTAN MAN 3 | Servery counter Roll-in niche (950 x 500 mm) with CNS panel, 2 230 V Schuko socket outlets at a height of 800 mm e.g. for SAW-L 2, SAW 2 or 2 BLANCOTHERM (in conjunction with 1 x ROLA 13) | 1200 x 700 x 900 | 400 V CEE plug | 566 619 |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 3

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 3

| Designation | Model | | | |
|---|---|----------------------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | | |
| | | 3.3.2 Operator side | | |
| | | 3.3.3 Customer and operator side | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.2 Schuko 230 V socket outlet, behind customer-side panelling for connecting further modules | | | |
| | 4.3 CEE 400 V socket outlet, behind customer-side panelling for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN SERVERY COUNTER MAN 4

- CNS top surface
- One 230 V Schuko socket outlet each at right on operator side, e.g. for connecting a plate dispenser
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|---|------------------------------|-------------------|-----------|
| MANHATTAN MAN 4 | Servery counter Roll-in niche (1300 x 500 mm) with CNS panel, 2 230 V Schuko socket outlets at a height of 800 mm e.g. for SAW-L 3, SAW 3 or 3 BLANCOTHERM (in conjunction with 1 x ROLA 13) | 1550 x 700 x 900 | 400 V CEE plug | 566 620 |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 4

| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 4

| Designation | Model | | | |
|---|---|----------------------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | | |
| | | 3.3.2 Operator side | | |
| | | 3.3.3 Customer and operator side | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN SERVERY COUNTER MAN 5

- CNS top surface
- One 230 V Schuko socket outlet each at right on operator side, e.g. for connecting a plate dispenser
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|-------------------|-----------|
| MANHATTAN MAN 5 | Servery counter Roll-in niche (1650 x 500 mm) with CNS panel, 2 230 V Schuko socket outlets at a height of 800 mm e.g. for 1 SAW 4 or 3 BLANCOTHERM (in conjunction with 1 x ROLA 13) | 1900 x 700 x 900 | 400 V CEE plug | 566 621 |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 5

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN SERVERY COUNTER MAN 5

| Designation | Model | | | |
|---|--|----------------------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | | |
| | | 3.3.2 Operator side | | |
| | | 3.3.3 Customer and operator side | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Glass gantry | 7.1 1-level, pulled down to top surface on customer side | | | |
| | 7.2 1-level, pulled down to top surface on customer side, with lighting | | | |
| | 7.3 1-level, pulled down to top surface on customer side, with lighting and heat radiator | | | |
| | 7.9 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm) | | | |
| | 7.10 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting | | | |
| | 7.11 2-level, pulled down on customer side, at bottom: down to top surface, at top: with pass-through (155 mm), with lighting and heat radiators | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN SHOWCASE, REFRIGERATED MVK 4

- Convection-cooled showcase with CNS bottom
- 3 levels, capacity per level: 3 x GN 1/1
- 9 removal doors with grip rails on customer side, 2 sliding doors on operator side
- Integrated cold light strip for illuminating food
- Temperature range of showcase: +4 °C to +12 °C, set to +7 °C at the factory
- Refrigerant: R 134 a, CFC-free
- Incl. electric condensed water evaporation
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options



| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|---|--|----------------------|-----------|
| MANHATTAN MVK 4 | Showcase, refrigerated Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 1550 x 700 x 900 (underframe) 1550 x 700 x 680 (showcase) | 230 V Schuko plug | 566 624 |
| MANHATTAN MVK 4 | Showcase, refrigerated 2 cabinet compartments closed on operator side, with 4 pairs each of deep-drawn support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 (underframe) 1550 x 700 x 680 (showcase) | 230 V Schuko plug | 566 625 |
| MANHATTAN MVK 4 | Showcase, refrigerated 2 cabinet compartments closed, convection-cooled and insulated on operator side, with 4 pairs each of support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 (underframe) 1550 x 700 x 680 (showcase) | 230 V Schuko plug | 566 626 |

OPTIONS FOR MANHATTAN SHOWCASE, REFRIGERATED MVK 4


| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |

OPTIONS FOR MANHATTAN SHOWCASE, REFRIGERATED MVK 4

| Designation | Model | | | | | | | | |
|--|---------------------------|--|-------|---------------|-------|-----------------|-------|-----------------------------|--|
| Feet | 3.2 Feet, stainless steel | | | | | | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 | Long side, with cooling slits | 3.3.1 | Customer side | 3.3.2 | Operator side | 3.3.3 | Customer/operator side [2x] | |
| | 3.4 | Short side, with cooling slits | 3.4.1 | Left | 3.4.2 | Right | 3.4.3 | Left and right [2x] | |
| Socket outlets | 4.1 | Schuko socket outlet, 230 V, in the panel | 4.1.1 | Left | 4.1.2 | Centre | 4.1.3 | Right | |
| | 4.2 | Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | | | | | |
| | 4.3 | CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | | | | | |
| Door | 4.4 | Door, lockable (2 doors) | | common locks | | different locks | | | |
| Side shelf | 4.5 | Stainless steel, short side | 4.5.1 | Left | 4.5.2 | Right | 4.5.3 | Left and right [2x] | |
| Middle shelf | 4.6 | Middle shelf, stainless steel, for model with open cabinet | | | | | | | |
| Connected load | 4.7 | 400 V | | | | | | | |
| Pull-out bottle rack | 4.8 | Pull-out bottle rack | | | | | | | |
| Tray slide | 5.1 | Stainless-steel round tube | 5.1.1 | Customer side | 5.1.2 | Operator side | 5.1.3 | Customer/operator side [2x] | |
| | 5.2 | Stainless-steel round tube, short side | 5.2.1 | Left | 5.2.2 | Right | 5.2.3 | Left and right [2x] | |
| | 5.3 | Resopal, colour: "stone grey" | 5.3.1 | Customer side | 5.3.2 | Operator side | 5.3.3 | Customer/operator side [2x] | |
| | 5.4 | Resopal, colour: "stone grey", short side | 5.4.1 | Left | 5.4.2 | Right | 5.4.3 | Left and right [2x] | |
| Module connection | 6.1 | Module attachment set | 6.1.1 | Left | 6.1.2 | Right | 6.1.3 | Left and right [2x] | |
| Stainless-steel panel | 8.1 | For aluminium corner profile, customer side | 8.1.1 | Left | 8.1.2 | Right | 8.1.3 | Left and right [2x] | |
| | 8.2 | For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | | | | | |

MANHATTAN STAND SHOWCASE, REFRIGERATED MVS 4

- Top surface made of CNS with seamlessly welded-in cooling tray and top-mounted, convection-cooled showcase
- Capacity of cooling tray: 3 x GN 1/1, max. depth: 150 mm
- Showcase: 2-level, capacity per level: 3 x GN 1/1, 6 removal doors with grip rails on customer side, 2 sliding doors on operator side, integrated cold light strip for illuminating food
- Pass-through height between top surface and showcase: 250 mm
- Cooling tray and showcase can be controlled separately
- Temperature range of showcase and cooling tray: +7 °C to +12 °C at an ambient temperature of +25 °C, set to +7 °C at factory
- Refrigerant: R 134 a, CFC-free
- Incl. electric condensed water evaporation
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options

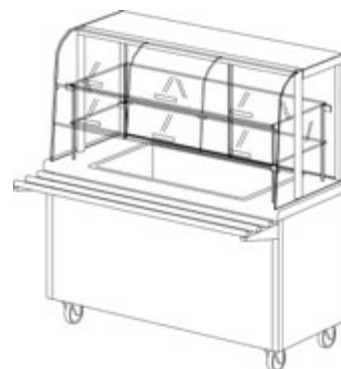

| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|--|----------------------|----------------|
| MANHATTAN MVS 4 | Stand showcase, refrigerated Cabinet compartment open on operator side with 4 pairs each of deep-drawn support ledges for middle shelves (see Options), spacing: 75 mm | 1550 x 700 x 900 (underframe) 1550 x 700 x 765 (showcase) | 230 V Schuko plug | 569 608 |
| MANHATTAN MVS 4 | Stand showcase, refrigerated 2 cabinet compartments closed on operator side with 4 pairs each of deep-drawn support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 (underframe) 1550 x 700 x 765 (showcase) | 230 V Schuko plug | 569 609 |
| MANHATTAN MVS 4 | Stand showcase, refrigerated 2 cabinet compartments closed, convection-cooled and insulated on operator side with 4 pairs each of support ledges, spacing: 75 mm, each for GN 1/1, 2 double-walled hinged doors | 1550 x 700 x 900 (underframe) 1550 x 700 x 765 (showcase) | 230 V Schuko plug | 569 610 |

OPTIONS FOR MANHATTAN STAND SHOWCASE, REFRIGERATED MVS 4


| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |

OPTIONS FOR MANHATTAN STAND SHOWCASE, REFRIGERATED MVS 4

| Designation | Model | | | |
|---|--|---------------------|---------------------|-----------------------------------|
| Feet | 3.2 Feet, stainless steel | | | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side, with cooling slits | 3.3.1 Customer side | 3.3.2 Operator side | 3.3.3 Customer/operator side [2x] |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.1 Schuko socket outlet, 230 V, in the panel | 4.1.1 Left | 4.1.2 Centre | 4.1.3 Right |
| | 4.2 Schuko socket outlet 230 V, in the installation compartment for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Door | 4.4 Door, lockable (2 doors) | common locks | different locks | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Middle shelf | 4.6 Middle shelf, stainless steel, for model with open cabinet | | | |
| Connected load | 4.7 400 V | | | |
| Pull-out bottle rack | 4.8 Pull-out bottle rack | | | |
| Slatted shelf | 4.9 3 pieces in set, stainless steel, for beverage servery counters | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | 5.1.2 Operator side | 5.1.3 Customer/operator side [2x] |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | 5.3.2 Operator side | 5.3.3 Customer/operator side [2x] |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Cooling | 7.1 Suitable for ambient temperature of +32 °C | | | |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN CASH REGISTER BOOTH MKS 4

- Module closed on 3 sides
- CNS top surface, width on customer side: 200 mm
- Slightly lowered CNS table top for positioning a cash register: 500 x 500 mm
- Foot area closed on 2 sides with footrest installed at an angle and 2 Schuko socket outlets
- Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, galvanised steel
- For customer and short-side panelling, see Options

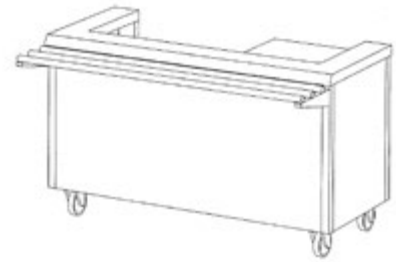

| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|-----------------|--|------------------------------|----------------------|-----------|
| MANHATTAN MKS 4 | Cash register booth Cash register table at left on operator side | 1550 x 700 x 900 | 230 V Schuko plug | 566 617 |
| MANHATTAN MKS 4 | Cash register booth Cash register table at right on operator side | 1550 x 700 x 900 | 230 V Schuko plug | 566 618 |

OPTIONS FOR MANHATTAN CASH REGISTER BOOTH MKS 4


| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN CASH REGISTER BOOTH MKS 4

| Designation | Model | | | |
|---|--|----------------------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3 Long side | 3.3.1 Customer side | | |
| | | 3.3.2 Operator side | | |
| | | 3.3.3 Customer and operator side | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Socket outlets | 4.2 Schuko 230 V socket outlet, behind customer-side panelling, for connecting further modules | | | |
| | 4.3 CEE socket outlet 400 V, in the installation compartment for connecting further modules | | | |
| Side shelf | 4.5 Stainless steel, short side | 4.5.1 Left | 4.5.2 Right | 4.5.3 Left and right [2x] |
| Connected load | 4.7 400 V | | | |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN CASH REGISTER BOOTH MKSS 4

- Module closed on 2 sides (can only be installed in conjunction with an additional module)
- CNS top surface, width on customer side: 200 mm
- Slightly lowered CNS table top for positioning a cash register: 500 x 500 mm
- Foot area closed on 2 sides with footrest installed at an angle and 2 Schuko socket outlets
- Castors with 125 mm dia., 3 galvanised steel steering castors, 2 of which have brakes
- For panelling on customer side, see Options

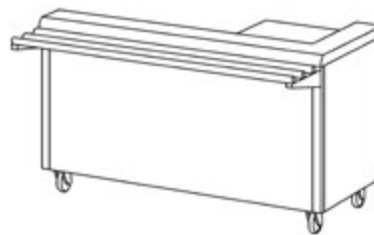

| Model | Designation | Dimensions L x W x H (mm) | Connected load | Order No. |
|------------------|--|------------------------------|----------------------|-----------|
| MANHATTAN MKSS 4 | Cash register booth Cash register table at left on operator side | 1550 x 700 x 900 | 230 V Schuko plug | 566 902 |
| MANHATTAN MKSS 4 | Cash register booth Cash register table at right on operator side | 1550 x 700 x 900 | 230 V Schuko plug | 566 903 |

OPTIONS FOR MANHATTAN CASH REGISTER BOOTH MKSS 4

| Designation | Model | | |
|---|-------|---|----------------------------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | |
| | 2.2 | Customer side, stainless steel | |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | |
| Feet | 3.2 | Feet, stainless steel | |
| Skirting panels (only in conjunction with feet 3.2) | 3.3 | Long side | 3.3.1 Customer side |
| | | | 3.3.2 Operator side |
| | | | 3.3.3 Customer and operator side |

OPTIONS FOR MANHATTAN CASH REGISTER BOOTH MKSS 4

| Designation | Model | | | |
|-----------------------|-------|--|---------------------|---------------------------|
| Socket outlets | 4.2 | Schuko 230 V socket outlet, behind customer-side panelling, for connecting further modules | | |
| | 4.3 | CEE 400 V socket outlet, behind customer-side panelling, for connecting further modules | | |
| Connected load | 4.7 | 400 V | | |
| Tray slide | 5.1 | Stainless-steel round tube | 5.1.1 Customer side | |
| | 5.3 | Resopal, colour: "stone grey" | 5.3.1 Customer side | |
| Module connection | 6.1 | Module attachment set | 6.1.1 Left | 6.1.2 Right |
| Stainless-steel panel | 8.1 | For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right |
| | | | | 8.1.3 Left and right [2x] |
| | 8.2 | For module connector, customer side, only in connection with module attachment set, only one panel required per module | | |

MANHATTAN 45° INSIDE-CORNER MODULE MI 45

- CNS top surface
- Without castors or feet
- For panelling on customer side, see Options




| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MI 45 | 45° inside-corner module With CNS panel on operator side Corner module can only be installed between two modules | 600 x 700 x 900 | 566 627 |

OPTIONS FOR MANHATTAN 45° INSIDE-CORNER MODULE MI 45

| Designation | Model |
|------------------------------|---|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" |
| | 2.2 Customer side, stainless steel |
| Skirting panel | 3.3.1 Customer side |
| | 3.3.2 Operator side |
| | 3.3.3 Customer and operator side |
| Tray slide | 5.1 Stainless-steel round tube, Customer side |
| | 5.2 Resopal, colour: "stone grey", Customer side |
| Stainless-steel panel | 8.3 For aluminium corner profiles, Customer side; set, consisting of 2 panels |

MANHATTAN 90° INSIDE-CORNER MODULE MI 90

- CNS top surface
- Without castors or feet
- For panelling on customer side, see Options

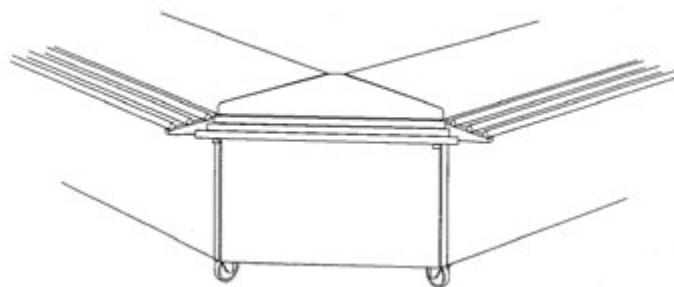


| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|---|------------------------------|-----------|
| MANHATTAN MI 90 | 90° inside-corner module With CNS panel on operator side Corner module can only be installed between two modules | 750 x 750 x 900 | 566 629 |

OPTIONS FOR MANHATTAN 90° INSIDE-CORNER MODULE MI 90

| Designation | Model |
|-----------------------|---|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" |
| | 2.2 Customer side, stainless steel |
| Skirting panel | 3.3.1 Customer side |
| | 3.3.2 Operator side |
| | 3.3.3 Customer and operator side |
| Tray slide | 5.1 Stainless-steel round tube, Customer side |
| | 5.2 Resopal, colour: "stone grey", Customer side |
| Stainless-steel panel | 8.3 For aluminium corner profiles, Customer side; set, consisting of 2 panels |

MANHATTAN 45° OUTSIDE-CORNER MODULE MA 45

- CNS top surface
- Without castors or feet
- For panelling on customer side, see Options

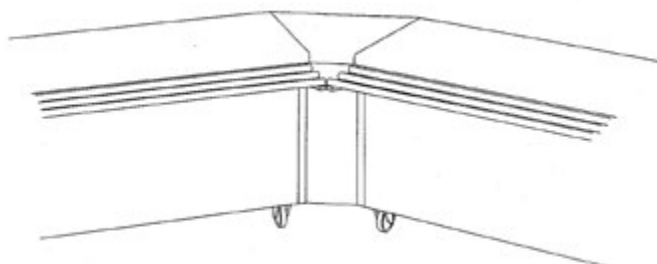


| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MA 45 | 45° outside-corner module With CNS panel on operator side Corner module can only be installed between two modules | 800 x 700 x 900 | 566 628 |

OPTIONS FOR MANHATTAN 45° OUTSIDE-CORNER MODULE MA 45

| Designation | Model |
|-----------------------|---|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" |
| | 2.2 Customer side, stainless steel |
| Skirting panel | 3.3.1 Customer side |
| | 3.3.2 Operator side |
| | 3.3.3 Customer and operator side |
| Stainless-steel panel | 8.3 For aluminium corner profiles, Customer side; set, consisting of 2 panels |

MANHATTAN 90° OUTSIDE-CORNER MODULE MA 90

- CNS top surface
- Without castors or feet
- For panelling on customer side, see Options

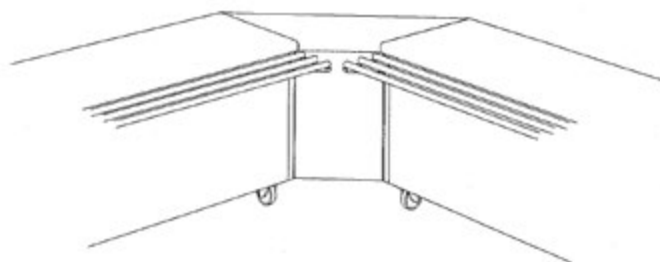


| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|-----------------|--|------------------------------|-----------|
| MANHATTAN MA 90 | 90° outside-corner module With CNS panel on operator side Corner module can only be installed between two modules | 1020 x 1020 x 900 | 566 630 |

OPTIONS FOR MANHATTAN 90° OUTSIDE-CORNER MODULE MA 90

| Designation | Model |
|-----------------------|---|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" |
| | 2.2 Customer side, stainless steel |
| Skirting panel | 3.3.1 Customer side |
| | 3.3.2 Operator side |
| | 3.3.3 Customer and operator side |
| Stainless-steel panel | 8.3 For aluminium corner profiles, Customer side; set, consisting of 2 panels |

MANHATTAN 45° INSIDE-CORNER MODULE MIF 45

- CNS top surface
- Castors with 125 mm dia., 3 steering castors, 2 of which have brakes, galvanised steel
- For panelling on customer side, see Options



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|------------------|---|------------------------------|-----------|
| MANHATTAN MIF 45 | 45° inside-corner module With CNS panel on operator side | 810 x 700 x 900 | 566 900 |

OPTIONS FOR MANHATTAN 45° INSIDE-CORNER MODULE MIF 45


| Designation | Model | | | |
|--------------|-------|---|------------|-------------|
| Top surfaces | 1.1 | Granite, Group I (Bianco Sardo, Rosa Beta) | | |
| | 1.2 | Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | |
| | 1.3 | Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | |
| Panelling | 2.1 | Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | |
| | 2.2 | Customer side, stainless steel | | |
| | 2.3 | Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right |
| | 2.4 | Short side, stainless steel | 2.4.1 Left | 2.4.2 Right |
| Castor model | 3.1 | Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | |
| Feet | 3.2 | Feet, stainless steel | | |

OPTIONS FOR MANHATTAN 45° INSIDE-CORNER MODULE MIF 45

| Designation | Model | | | |
|---|--|---------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3.1 Customer side | | | |
| | 3.3.2 Operator side | | | |
| | 3.3.3 Customer and operator side | | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN 90° INSIDE-CORNER MODULE MIF 90

- CNS top surface
- Castors with 125 mm dia., 3 steering castors, 2 of which have brakes, galvanised steel
- For panelling on customer side, see Options



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|------------------|---|------------------------------|-----------|
| MANHATTAN MIF 90 | 90° inside-corner module With CNS panel on operator side | 1020 x 700 x 900 | 566 901 |

OPTIONS FOR MANHATTAN 90° INSIDE-CORNER MODULE MIF 90


| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN 90° INSIDE-CORNER MODULE MIF 90

| Designation | Model | | | |
|---|--|---------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3.1 Customer side | | | |
| | 3.3.2 Operator side | | | |
| | 3.3.3 Customer and operator side | | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Customer side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Customer side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN 45° OUTSIDE-CORNER MODULE MAF 45

- CNS top surface
- Castors with 125 mm dia., 3 steering castors, 2 of which have brakes, galvanised steel
- For panelling on customer side, see Options



| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|------------------|--|------------------------------|-----------|
| MANHATTAN MAF 45 | 45° outside-corner module With CNS panel on operator side | 800 x 700 x 900 | 566 904 |

OPTIONS FOR MANHATTAN 45° OUTSIDE-CORNER MODULE MAF 45


| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN 45° OUTSIDE-CORNER MODULE MAF 45

| Designation | Model | | | |
|---|--|---------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3.1 Customer side | | | |
| | 3.3.2 Operator side | | | |
| | 3.3.3 Customer and operator side | | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Operator side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Operator side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN 90° OUTSIDE-CORNER MODULE MAF 90

- CNS top surface
- Castors with 125 mm dia., 3 steering castors, 2 of which have brakes, galvanised steel
- For panelling on customer side, see Options

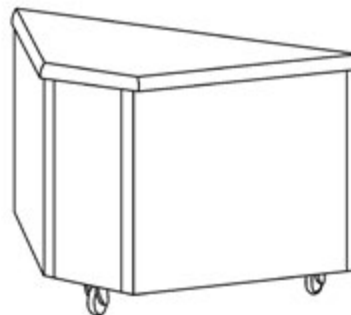

| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|------------------|--|------------------------------|-----------|
| MANHATTAN MAF 90 | 90° outside-corner module With CNS panel on operator side | 1020 x 700 x 900 | 566 905 |

OPTIONS FOR MANHATTAN 90° OUTSIDE-CORNER MODULE MAF 90

| Designation | Model | | | |
|--------------|---|------------|-------------|---------------------------|
| Top surfaces | 1.1 Granite, Group I (Bianco Sardo, Rosa Beta) | | | |
| | 1.2 Granite, Group II (Baltic Brown, Nero Impala, Pedras Salgadas) | | | |
| | 1.3 Granite, Group III (Labrador Blue Pearl, Labrador Emerald Pearl, Nero Assoluto) | | | |
| Panelling | 2.1 Customer side, Resopal, "Plain Colours" or "Woodgrains Authentic" | | | |
| | 2.2 Customer side, stainless steel | | | |
| | 2.3 Short side, Resopal, "Plain Colours" or "Woodgrains Authentic" | 2.3.1 Left | 2.3.2 Right | 2.3.3 Left and right [2x] |
| | 2.4 Short side, stainless steel | 2.4.1 Left | 2.4.2 Right | 2.4.3 Left and right [2x] |
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel | | | |
| Feet | 3.2 Feet, stainless steel | | | |

OPTIONS FOR MANHATTAN 90° OUTSIDE-CORNER MODULE MAF 90

| Designation | Model | | | |
|---|--|---------------------|-------------|---------------------------|
| Skirting panels (only in conjunction with feet 3.2) | 3.3.1 Customer side | | | |
| | 3.3.2 Operator side | | | |
| | 3.3.3 Customer and operator side | | | |
| | 3.4 Short side | 3.4.1 Left | 3.4.2 Right | 3.4.3 Left and right [2x] |
| Tray slide | 5.1 Stainless-steel round tube | 5.1.1 Operator side | | |
| | 5.2 Stainless-steel round tube, short side | 5.2.1 Left | 5.2.2 Right | 5.2.3 Left and right [2x] |
| | 5.3 Resopal, colour: "stone grey" | 5.3.1 Operator side | | |
| | 5.4 Resopal, colour: "stone grey", short side | 5.4.1 Left | 5.4.2 Right | 5.4.3 Left and right [2x] |
| Module connection | 6.1 Module attachment set | 6.1.1 Left | 6.1.2 Right | 6.1.3 Left and right [2x] |
| Stainless-steel panel | 8.1 For aluminium corner profile, customer side | 8.1.1 Left | 8.1.2 Right | 8.1.3 Left and right [2x] |
| | 8.2 For module connector, customer side, only in connection with module attachment set, only one panel required per module | | | |

MANHATTAN SILVERWARE AND TRAY SERVERY COUNTER BT 400

- With silverware attachment incl. 5 cutlery holders of the size GN 1/4-150 made of CNS with transparent, half-flap fold-down Plexiglas cover and 1 CNS serviette dispenser for size 125 x 90 mm
- Capacity: approx. 120 trays, approx. 500 pieces of cutlery
- Castors with 125 mm dia., 3 steering castors, 2 of which have brakes, galvanised steel




| Model | Designation | Dimensions L x W x H (mm) | Order No. |
|------------------|-------------------------------------|------------------------------|-----------|
| MANHATTAN BT 400 | Silverware and tray servery trolley | 900 x 700 x 1270 | 566 316 |

OPTIONS FOR MANHATTAN SILVERWARE AND TRAY SERVERY COUNTER BT 400

| Designation | Model |
|--------------|---|
| Castor model | 3.1 Castors with 125 mm dia., 4 steering castors, 2 of which have brakes, stainless steel |

MANHATTAN GRANITE TOP SURFACES

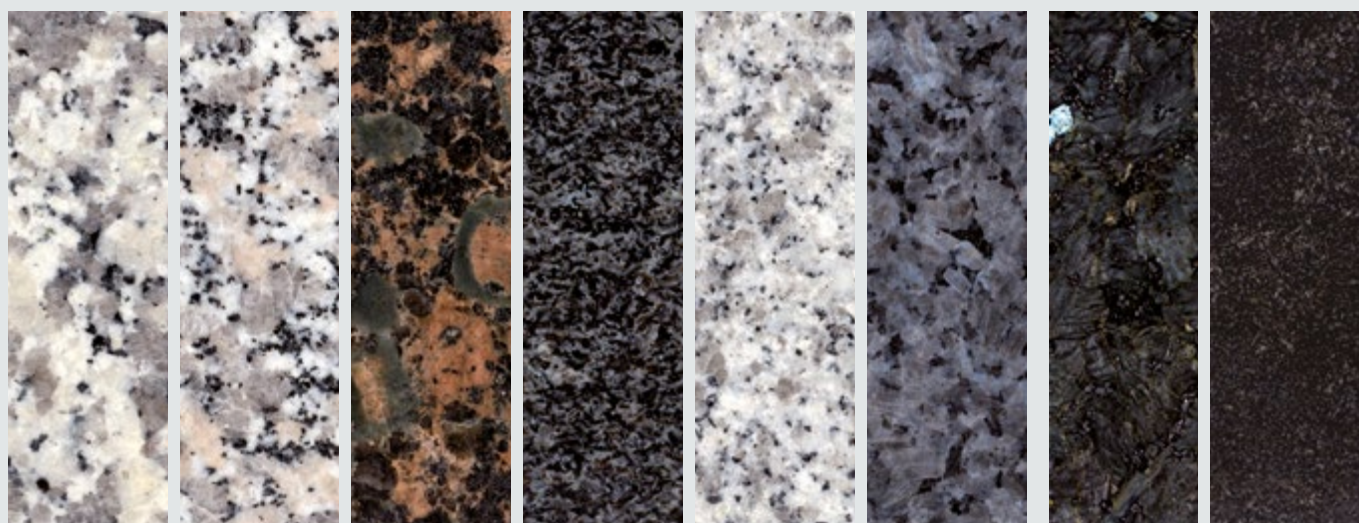

Bianco Sardo

Rosa Beta

Baltic Brown

Nero Impala

Pedras
Salgadas

Labrador Blue
Pearl

Labrador
Emerald Pearl

Nero Assoluto


Group I

Group II

Group III

RESOPAL – PLAIN COLOURS


The Resopal panelling for MANHATTAN are available in the colours "Plain Colours" or in the wood designs "Woodgrains Authentic". The colours of the samples shown here are not binding. You will find additional information and the entire range of colours at www.resopal.de

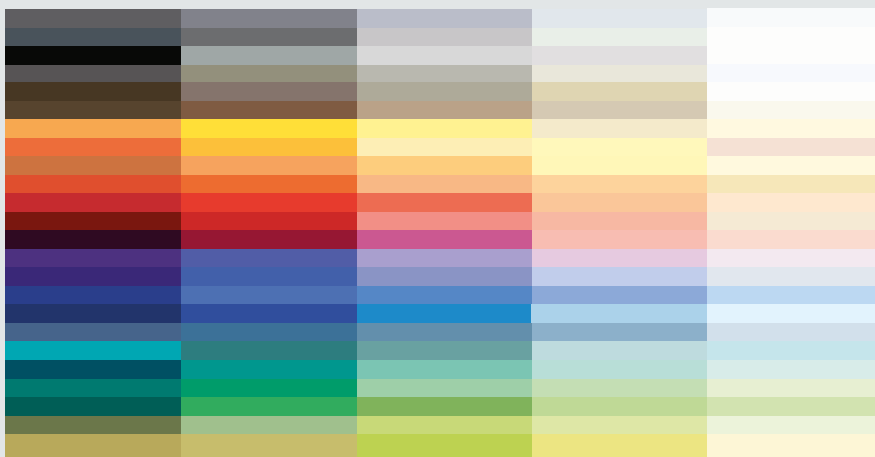


RESOPAL – "WOODGRAINS AUTHENTIC"



4489-60
Sunset Cruise
Wood



4447-60
Noce Romantica
Walnut



4367-60
Sun Maple
Maple




4483-60
Weasel Larch
Wood



4325-60
Eternal Cherry
Cherry wood




4478-60
Almond Pear
Pear wood



4426-60
Java Teak
Teak




4359-60
Capital Elm
Elm




4306-60
Global Beech
Beech




4469-60
Mora Birch
Birch




4314-60/EM
Loft Oak
Oak



4496-60
Black Tulip
Wood



4305-60
New Oslo Beech
Beech




4209-60
Ottawa Maple
Maple



4312-60
Quebec Oak
Oak




4328-60
Passion Cherry
Cherry wood



4390-60/EM
Wenge Bonobo
Wenge wood



4369-60
Ambient Maple
Maple



4448-60
Unique Elm
Elm



4457-60
Yorkshire Oak
Oak



4387-60
Lounge Mahogany
Mahogany



4471-60
White Acacia
Wood










4360-60
Real Ash
Ash














4451-60
Noce Paola
Walnut



4484-60
Zermatt Pine
Pine

| | | Model variant | | | | Options | | | | | | | | | | | | | | | |
|--|-----------------------------------|---------------------------------|--------------|--------|--------|---------|-----------------|---------|----------------|----------------------------|--------------------------|-------------------------|------|-------------------|----------------|-----------------------------------|-----------------------------------|-------|--------------------|--------------|----------------------|
| Illustration | Models | Dimensions L x W x H (in mm) | Compartments | | | | Top surfaces | | Panel- ling | Installation ver- sions | | | | Socket outlets | | | Connec- ted load | | Miscel- laneous | | |
| <div>Legend</div> <div>▲ Model variant</div> <div>■ Standard</div> <div>○ Optional</div> | | | open | closed | heated | cooled | Stainless steel | Granite | Resopal | Stainless steel | Galvanised-steel castors | Stainless-steel castors | Feet | Skirting panels | 230 V in panel | 230 V in installation compartment | 400 V in installation compartment | 230 V | 400 V | Middle shelf | Pull-out bottle rack |
| | Heated servery counter | | | | | | | | | | | | | | | | | | | | |
| | MWA 3 | 1200 x 700 x 900 | ▲ | ▲ | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | | ■ | | | |
| | MWA 4 | 1550 x 700 x 900 | ▲ | ▲ | ▲ | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | | ■ | ○ | | |
| | MWA 5 | 1900 x 700 x 900 | ▲ | ▲ | ▲ | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | | ■ | ○ | | |
|  | Cooled servery counter | | | | | | | | | | | | | | | | | | | | |
| | MKA 3 | 1200 x 700 x 900 | ▲ | ▲ | | ▲ | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | |
| | MKA 4 | 1550 x 700 x 900 | ▲ | ▲ | | ▲ | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | |
| | Convection-cooled servery counter | | | | | | | | | | | | | | | | | | | | |
|  | MKU 3 | 1200 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | | | |
| | MKU 4 | 1550 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | | | |
| | Plain servery counter | | | | | | | | | | | | | | | | | | | | |
| | MNE 3 | 1200 x 700 x 900 | ▲ | ▲ | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | |
|  | MNE 4 | 1550 x 700 x 900 | ▲ | ▲ | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | |
| | MNE 5 | 1900 x 700 x 900 | ▲ | ▲ | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | |
| | MNE V | 800–1900 x 700 x 900 | ▲ | ▲ | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | |
| | Pre-Mix/Post-Mix | | | | | | | | | | | | | | | | | | | | |
|  | MPP 3 | 1200 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | ○ | ○ | | |
| | MPP 4 | 1550 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | ○ | ○ | | |
| | MPP 5 | 1900 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | ○ | ○ | | |
| | Roll-in counter | | | | | | | | | | | | | | | | | | | | |
| | MEN V | 500–1500 x 200 x 900 | | | | | ■ | ○ | ○ | ○ | | | | ○ | | | | | | | |
| Servery counter | | | | | | | | | | | | | | | | | | | | | |
|  | MAN 3 | 1200 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | | ■ | | |
| | MAN 4 | 1550 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | | ■ | | |
| | MAN 5 | 1900 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | | ■ | | |
| | Showcase, refrigerated | | | | | | | | | | | | | | | | | | | | |
|  | MVK 4 | 1550 x 700 x 900 | ▲ | ▲ | | ▲ | ■ | | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | ○ | ○ |
| Stand showcase, refrigerated | | | | | | | | | | | | | | | | | | | | | |
|  | MVS 4 | 1550 x 700 x 900 | ▲ | ▲ | | ▲ | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | ○ | ○ | ■ | ○ | ○ | ○ |

BLANCO Professional **63**

| | | Model variant | | | | | Options | | | | | | | | | | | | | | | |
|--|--|---------------------------------|--------------|------|--------|--------|--------------|-----------------|----------|---------|-----------------------|--------------------------|-------------------------|------|-----------------|----------------|-----------------------------------|-----------------------------------|-------|---------------|--------------|----------------------|
| Illustration | Models | Dimensions L x W x H (in mm) | Compartments | | | | Top surfaces | | Paneling | | Installation versions | | | | Socket outlets | | | Connected load | | Miscellaneous | | |
| <div>Legend</div> <div>▲ Model variant</div> <div>■ Standard</div> <div>○ Optional</div> | | | | | | | | | | | | | | | | | | | | | | |
| | | | | open | closed | heated | cooled | Stainless steel | Granite | Resopal | Stainless steel | Galvanised-steel castors | Stainless-steel castors | Feet | Skirting panels | 230 V in panel | 230 V in installation compartment | 400 V in installation compartment | 230 V | 400 V | Middle shelf | Pull-out bottle rack |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
|  | Cash register booth, closed on 3 sides | | | | | | | | | | | | | | | | | | | | | |
| | MKS 4 | 1550 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | ○ | | ○ | ■ | ○ | | | |
|  | Cash register booth, closed on 2 sides | | | | | | | | | | | | | | | | | | | | | |
| | MKSS 4 | 1550 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | ○ | ○ | ■ | ○ | | | |
|  | 45° inside corner | | | | | | | | | | | | | | | | | | | | | |
| | MI 45 | 600 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | | | | | ○ | | | | | | | |
|  | 90° inside corner | | | | | | | | | | | | | | | | | | | | | |
| | MI 90 | 750 x750 x 900 | | | | | ■ | ○ | ○ | ○ | | | | | ○ | | | | | | | |
|  | 45° outside corner | | | | | | | | | | | | | | | | | | | | | |
| | MA 45 | 800 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | | | | | ○ | | | | | | | |
|  | 90° outside corner | | | | | | | | | | | | | | | | | | | | | |
| | MA 90 | 1020 x 1020 x 900 | | | | | ■ | ○ | ○ | ○ | | | | | ○ | | | | | | | |
|  | 45° inside corner | | | | | | | | | | | | | | | | | | | | | |
| | MIF 45 | 810 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | | | | | | | |
|  | 90° inside corner | | | | | | | | | | | | | | | | | | | | | |
| | MIF 90 | 1020 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | | | | | | | |
|  | 45° outside corner | | | | | | | | | | | | | | | | | | | | | |
| | MAF 45 | 800 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | | | | | | | |
|  | 90° outside corner | | | | | | | | | | | | | | | | | | | | | |
| | MAF 90 | 1020 x 700 x 900 | | | | | ■ | ○ | ○ | ○ | ■ | ○ | ○ | ○ | | | | | | | | |
|  | Silverware and tray servery counter | | | | | | | | | | | | | | | | | | | | | |
| | MBT | 900 x 600 x 1270 | | | | | | | | | | ■ | ○ | | | | | | | | | |

Options

Miscellaneous

Tray slides

| Slatted shelf for beverages | Lockable doors | Stainless-steel panel for corner profiles | Module attachment set | Side shelf short side | Stainless-steel round tube | Synthetic-coated particle board |
|-----------------------------|----------------|---|-----------------------|-----------------------|----------------------------|---------------------------------|
| | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | | | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | | | | |
| | | <input type="radio"/> | | | | |
| | | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | <input type="radio"/> | | <input type="radio"/> | <input type="radio"/> |
| | | <input type="radio"/> | | | | |

BLANCO Professional GmbH + Co KG
CATERING
P.O. Box 13 10
75033 Oberderdingen
Germany
Phone +49 7045 44-81900
Fax +49 7045 44-81481
catering.export@blanco.de
www.blanco-professional.com

BLANCO
PROFESSIONAL

Catering

Railway

Medical

Industrial